


NOTE:
USE 22" D.O.T. APPROVED FABRIC
USE WOOD OR STEEL POST.

SIDE VIEW

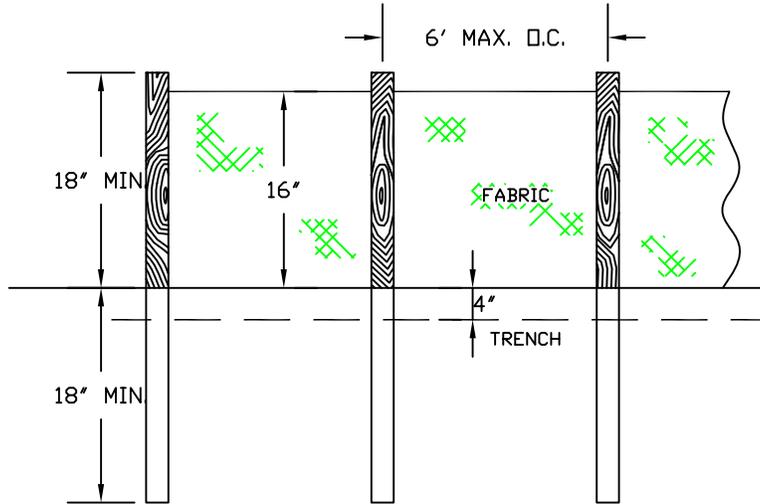

FRONT VIEW

TYPE B FABRIC (22")

USE:

- 1) ON PROJECTS, SUCH AS RESIDENTIAL HOME SITES OR SMALL COMMERCIAL DEVELOPMENTS, WHERE LIFE OF THE PROJECT IS LESS THAN 6 MONTHS.
- 2) WHERE THE SLOPE GRADIENT IS LESS THAN OR EQUAL TO 3:1.

POST SIZE

MIN. LENGTH	TYPE OF POST	SIZE OF POST
3'	SOFT WOOD	2" DIA. OR 2X2
3'	PAK	1.0"X1.0"
3'	STEEL	0.75 LB./FT. MIN.

FASTENERS FOR WOOD POST (WIRE STAPLES)

GAUGE	CROWN	LEGS	STAPLES/POST
17 MIN.	3/4" WIDE	1/2" LONG	5 MIN.

FASTENERS FOR WOOD POST (NAILS)

GAUGE	LENGTH	BUTTON HEADS	NAIL/POST
14 MIN.	1"	3/4"	4 MIN.

FENCE

NOTE: FILTER FABRIC MAY ALSO BE ATTACHED TO THE POST BY WIRE, CORD, AND POCKETS.

TENSILE STRENGTH (LBS. MIN.) (1) (ASTM D-4632)	ELONGATION (%MAX.) (ASTM D-4632)	ADS (APPARENT OPENING SIZE) (MAX. SIEVE SIZE) (ASTM D-4751)	FLOW RATE (GAL./MIN./SQ. FT.) (GDT-87)	ULTRAVIOLET STABILITY (2) (ASTM D-4632 AFTER 300 HOURS WEATHERING IN ACCORDANCE WITH ASTM D-4355)	BURSTING STRENGTH (PSI MIN.) (ASTM D-3786 DIAPHRAGM BURSTING STRENGTH TESTER)	MIN. FABRIC WIDTH (INCHES)
WARP-120 FILL-100	40	#30	25	80	175	22

(1) MIN. ROLL AVERAGE OF FIVE SPECIMENS.

(2) PERCENT OF REQUIRED INITIAL MIN. TENSILE STRENGTH.

STANDARD CONSTRUCTION
DETAILS



CITY OF
savannah

SILT FENCE - TYPE B

PLATE NUMBER:

APPROVED:

Amy D. ...
CITY ENGINEER

SCALE: N.T.S.

DATED: DECEMBER 1998

E4